

# DYNAMIS

## LITHIUM-LINE

### LI-130 /S (ER14505, Size AA)

Lithium Thionyl Chloride Cell



#### Electrical characteristics


(Typical values for cells stored for one year or less at +25°C max.)

Nominal voltage	3.6 V
Nominal capacity at 2.0 mA with 2.0 V cut off voltage (25 °C). The capacity restored by the cell varies according to current drain, temperature and cut-off voltage.	2'600 mAh
Max. recommended continuous current	100 mA
Pulse capability (The readings may vary according to the pulse characteristics, temperature, and the cell's previous history. Fitting cell with a capacitor is recommended in severe conditions applications.)	200 mA
Operating temperature range (Operation at temperature different from ambient may lead to reduced capacity and lower voltage plateau readings.)	-55°C ~ +85°C
Storage temperature (recommended for max. 60% rel. humidity, according other demands contact DYNAMIS)	30°C max.

#### Physical characteristics

Height	50.5 mm
Diameter	14.5 mm
Weight ca.	19 g

#### Drawing:

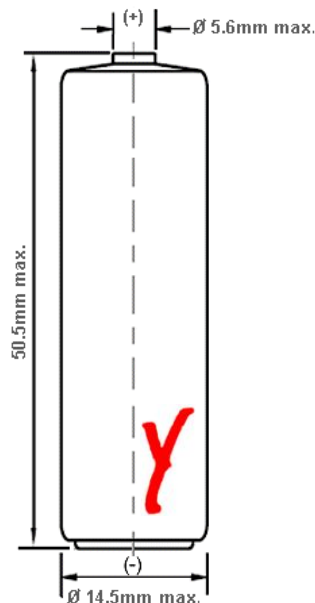

### Key features

- n High and stable operating voltage
- n High minimum voltage during pulse application
- n Low self discharge rate (less than 1 % after 1 year of storage at +25°C)
- n Stainless steel container
- n Hermetic glass-to-metal sealing
- n Non-flammable electrolyte
- n UL certified

### Warning

- n Fire, explosion and severe burn hazard.
- n Do not recharge, crush, disassemble, heat over 100°C or incinerate.
- n Do not expose cell or contents to water

### Main applications

Utility metering  
Alarms and security devices  
Memory back-up  
Tracking systems  
Automotive electronics  
Professional electronics etc.

### Terminal variations

Standard /S  
Solder tabs /T  
Axial Pins /P  
Polarized Tabs +(1)/-(2) /PT  
Polarized Tabs +(2)/-(1) /PTV  
Pins +(1)/-(1) /EPR

For other terminals please contact DYNAMIS.

Compliance with Safety Standards  
IEC 60086-4  
EN 50020

All information (subject to change without notice) contained in this document is for reference only and should not be used as a basis for product guaranty or warranty. For applications other than those described here, please consult your nearest DYNAMIS Sales or Marketing Office or Distributors.

